

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series




Description

Transient Voltage Suppressor (TVS) is a circuit protection component that either attenuates (reduces) or filters a transient voltage spike (overvoltage), TVS diodes provide critical protection by going into avalanche breakdown within no more than a few nanoseconds after a strike, clamping the transient voltage, and routing its current to the ground.

Applications

- Communication Equipment
- Security & Protection
- Industrial Control Equipment
- Power Supply
- Automotive Electronics
- New Energy
- Lightning Protection


Functional Diagram

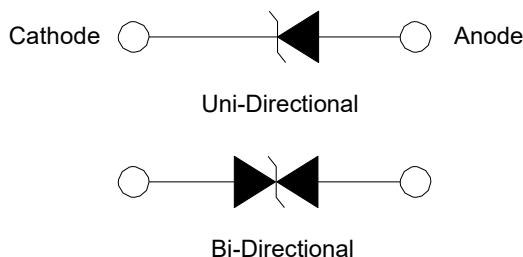

Features

- AEC-Q101 Qualified
- Low incremental surge resistance
- Excellent clamping capability
- Low profile package with built-in strain relief
- Typical I_R less than 1.0 μA above 12 V
- 600 W peak pulse power capability with a 10/1000 μs Waveform, repetition rate (duty cycle): 0.01%
- For surface mounted applications to optimize board space
- Typical failure mode is short from over-specified voltage or current
- IEC 61000-4-2 ESD 30 kV (Air), 30 kV (Contact)
- EFT protection of data lines in accordance with IEC 61000 -4-4
- Very fast response time
- Glass passivated chip junction
- High temperature to reflow soldering guaranteed: 260 $^{\circ}C/30sec$
- $V_{BR} @ T_J = V_{BR@25^{\circ}C} \times (1 + \alpha T \times (T_J - 25))$
(αT : Temperature Coefficient, typical value is 0.1%)
- Plastic package is flammability rated V-0 per Underwriters Laboratories
- Meet MSL level1, per J-STD-020
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

Package Outline Dimensions (DO-214AA)

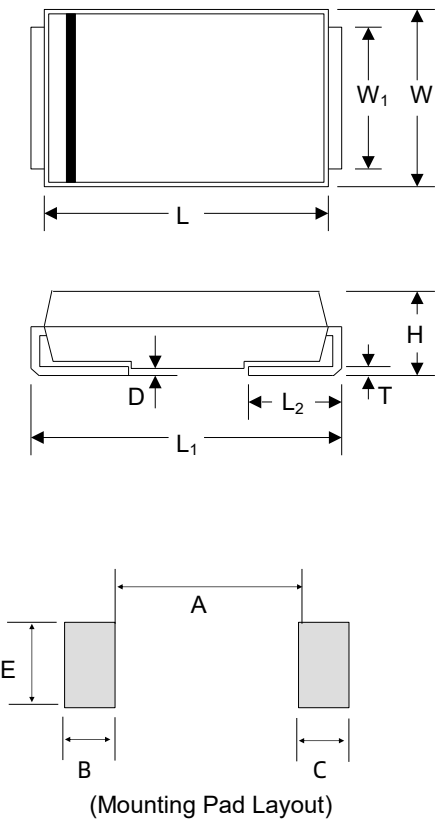

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	4.06	4.75	0.160	0.187
W	3.30	3.94	0.130	0.155
W ₁	1.93	2.20	0.076	0.086
H	1.99	2.61	0.078	0.103
T	0.152	0.305	0.0086	0.012
L ₁	5.21	5.59	0.205	0.220
L ₂	0.76	1.52	0.030	0.060
D	-	0.203	-	0.008
A	-	2.74	-	0.107
B	2.16	-	0.085	-
C	2.16	-	0.085	-
E	2.26	-	0.089	-

Maximum Ratings and Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified.)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation (Fig2) with a 10/1000 μ s Test Waveform ⁽¹⁾⁽²⁾ (Fig4)-Signal Die Parts	P _{PPM}	600	W
Peak Pulse Power Dissipation((Fig2) with a 10/1000 μ s Test Waveform(1)(2)(Fig4)--Stacked Die Parts ⁽⁵⁾	P _{PPM}	800	W
Peak Power Dissipation on Infinite Heat Sink at T _L =50 °C	P _D	5.0	W
Peak Forward Surge Current,8.3 ms single half sinewave superimposed on rated load (JEDEC Method) ⁽³⁾	I _{FSM}	100	A
Maximum Instantaneous Forward Voltage at 50 A for Unidirectional Only ⁽⁴⁾	V _F	3.5/5.0	V
Operating Temperature Range	T _J	-65 to 150	°C
Storage Temperature Range	T _{STG}	-65 to 175	°C
Typical Thermal Resistance Junction to Lead	R _{θJL}	20	°C / W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	100	°C / W

Notes


1. Non-repetitive current pulse, per Fig. 4 and derated above T_J(initial)=25 °C per Fig. 3.
2. Mounted on 5.0 mm² land areas.
3. Measured of 8.3 ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.
4. V_F < 3.5 V for single die parts and V_F < 5.0 V for stacked-die parts.
5. For stacked die component details, please refer to part numbers labeled by * in Electrical Characteristics.

TVS Diodes



Transient Voltage Suppression Diodes

ASMB Series

Part Numbering System

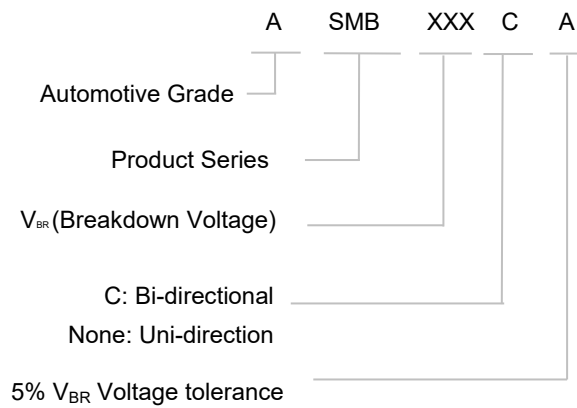

Marking

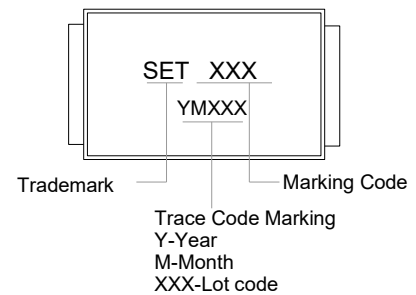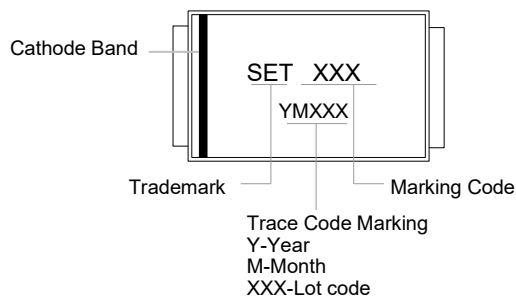

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series

Electrical Characteristics (T_A=25°C unless otherwise noted)Table 1

Part Number		Device Marking Code		Breakdown Voltage V _{BR} @I _T		Test Current I _T	Reverse Stand-off Voltage V _R	Max. Reverse Leakage I _R @V _R	Max. Peak Pulse Current I _{PPM}	Max. Clamping Voltage V _C @I _{PPM}
				Min	Max					
Uni	Bi	Uni	Bi	(V)		(mA)	(V)	(μA)	(A)	(V)
ASMB6.8A	ASMB6.8CA	A6V8A	A6V8C	6.45	7.14	10	5.80	500.00	58.10	10.50
ASMB7.5A	ASMB7.5CA	A7V5A	A7V5C	7.13	7.88	10	6.40	300.00	54.00	11.30
ASMB8.2A	ASMB8.2CA	A8V2A	A8V2C	7.79	8.61	10	7.02	100.00	50.40	12.10
ASMB9.1A	ASMB9.1CA	A9V1A	A9V1C	8.65	9.55	1	7.78	50.00	45.50	13.40
ASMB10A	ASMB10CA	A10A	A10C	9.50	10.50	1	8.55	10.00	42.10	14.50
ASMB11A	ASMB11CA	A11A	A11C	10.50	11.60	1	9.40	5.00	39.10	15.60
ASMB12A	ASMB12CA	A12A	A12C	11.40	12.60	1	10.20	5.00	36.50	16.70
ASMB13A	ASMB13CA	A13A	A13C	12.40	13.70	1	11.10	1.00	33.50	18.20
ASMB15A	ASMB15CA	A15A	A15C	14.30	15.80	1	12.80	1.00	28.80	21.20
ASMB16A	ASMB16CA	A16A	A16C	15.20	16.80	1	13.60	1.00	27.10	22.50
ASMB18A	ASMB18CA	A18A	A18C	17.10	18.90	1	15.30	1.00	24.20	25.50
ASMB20A	ASMB20CA	A20A	A20C	19.00	21.00	1	17.10	1.00	22.00	27.70
ASMB22A	ASMB22CA	A22A	A22C	20.90	23.10	1	18.80	1.00	19.90	30.60
ASMB24A	ASMB24CA	A24A	A24C	22.80	25.20	1	20.50	1.00	18.40	33.20
ASMB27A	ASMB27CA	A27A	A27C	25.70	28.40	1	23.10	1.00	16.30	37.50
ASMB30A	ASMB30CA	A30A	A30C	28.50	31.50	1	25.60	1.00	14.70	41.40
ASMB33A	ASMB33CA	A33A	A33C	31.40	34.70	1	28.20	1.00	13.30	45.70
ASMB36A	ASMB36CA	A36A	A36C	34.20	37.80	1	30.80	1.00	12.20	49.90
ASMB39A	ASMB39CA	A39A	A39C	37.10	41.00	1	33.30	1.00	11.30	53.90
ASMB43A	ASMB43CA	A43A	A43C	40.90	45.20	1	36.80	1.00	10.30	59.30
ASMB47A	ASMB47CA	A47A	A47C	44.70	49.40	1	40.20	1.00	9.40	64.80
ASMB51A	ASMB51CA	A51A	A51C	48.50	53.60	1	43.60	1.00	8.70	70.10
ASMB56A	ASMB56CA	A56A	A56C	53.20	58.80	1	47.80	1.00	7.90	77.00

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series

Part Number		Device Marking Code		Breakdown Voltage $V_{BR@I_T}$		Test Current I_T	Reverse Stand-off Voltage V_R	Max. Reverse Leakage $I_R@V_R$	Max. Peak Pulse Current I_{PPM}	Max. Clamping Voltage $V_C@I_{PPM}$
				Min	Max					
Uni	Bi	Uni	Bi	(V)		(mA)	(V)	(μ A)	(A)	(V)
ASMB58A	ASMB58CA	A58A	A58C	55.10	60.90	1	52.78	1.00	7.70	79.80
ASMB62A	ASMB62CA	A62A	A62C	58.90	65.10	1	53.00	1.00	7.20	85.00
ASMB68A	ASMB68CA	A68A	A68C	64.60	71.40	1	58.10	1.00	6.60	92.00
ASMB75A	ASMB75CA	A75A	A75C	71.30	78.80	1	64.10	1.00	5.90	103.00
ASMB82A	ASMB82CA	A82A	A82C	77.90	86.10	1	70.10	1.00	5.40	113.00
ASMB91A	ASMB91CA	A91A	A91C	86.50	95.50	1	77.80	1.00	4.90	125.00
ASMB100A	ASMB100CA	A100A	A100C	95.00	105.00	1	85.50	1.00	4.50	137.00
ASMB110A	ASMB110CA	A110A	A110C	105.00	116.00	1	94.00	1.00	4.00	152.00
ASMB120A	ASMB120CA	A120A	A120C	114.00	126.00	1	102.00	1.00	3.70	165.00
ASMB130A	ASMB130CA	A130A	A130C	124.00	137.00	1	111.00	1.00	3.40	179.00
ASMB150A	ASMB150CA	A150A	A150C	143.00	158.00	1	128.00	1.00	2.90	207.00
ASMB160A	ASMB160CA	A160A	A160C	152.00	168.00	1	136.00	1.00	2.80	219.00
ASMB170A	ASMB170CA	A170A	A170C	162.00	179.00	1	145.00	1.00	2.60	234.00
ASMB180A	ASMB180CA	A180A	A180C	171.00	189.00	1	154.00	1.00	2.50	246.00
ASMB200A	ASMB200CA	A200A	A200C	190.00	210.00	1	171.00	1.00	2.20	274.00
ASMB220A	ASMB220CA	A220A	A220C	209.00	231.00	1	185.00	1.00	1.90	328.00
ASMB250A	ASMB250CA	A250A	A250C	237.00	263.00	1	214.00	1.00	1.80	344.00
ASMB300A	ASMB300CA	A300A	A300C	285.00	315.00	1	256.00	1.00	1.50	414.00
ASMB350A*	ASMB350CA*	A350A	A350C	332.00	368.00	1	300.00	1.00	1.30	482.00
ASMB400A*	ASMB400CA*	A400A	A400C	380.00	420.00	1	342.00	1.00	1.10	548.00
ASMB440A*	ASMB440CA*	A440A	A440C	418.00	462.00	1	376.00	1.00	1.00	602.00
ASMB480A*	ASMB480CA*	A480A	A480C	456.00	504.00	1	408.00	1.00	0.90	658.00
ASMB510A*	ASMB510CA*	A510A	A510C	485.00	535.00	1	434.00	1.00	0.90	698.00
ASMB520A*	ASMB520CA*	A520A	A520C	494.50	545.50	1	443.00	1.00	0.90	718.00
ASMB530A*	ASMB530CA*	A530A	A530C	503.50	556.50	1	451.00	1.00	0.80	725.00
ASMB540A*	ASMB540CA*	A540A	A540C	513.00	567.00	1	460.00	1.00	0.80	740.00
ASMB550A*	ASMB550CA*	A550A	A550C	522.50	577.50	1	468.00	1.00	0.80	760.00
ASMB600A*	ASMB600CA*	A600A	A600C	570.00	630.00	1	512.00	1.00	0.75	828.00
ASMB650A*	ASMB650CA*	A650A	A650C	617.50	682.50	1	553.00	1.00	0.75	897.00

Notes:



- For bidirectional type having V_R of 10 volts and less, the I_R should be doubled.
- For parts without A in the PN, the V_{BR} tolerance is $\pm 10\%$ and V_C is 5% higher than parts with A. The parts without A are currently available, but not recommended for new designs. The parts with A are preferred.
- For stacked die component details, please refer to models marked with * in electrical characteristics table.

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series

I-V Curve Characteristics

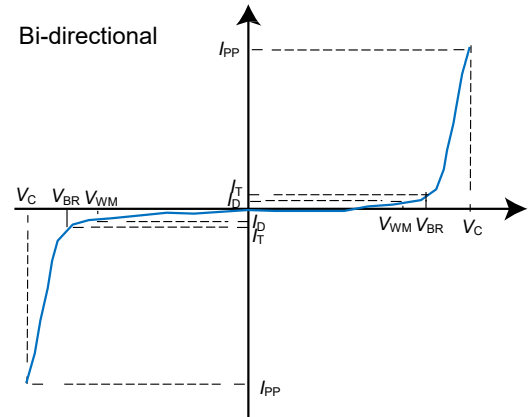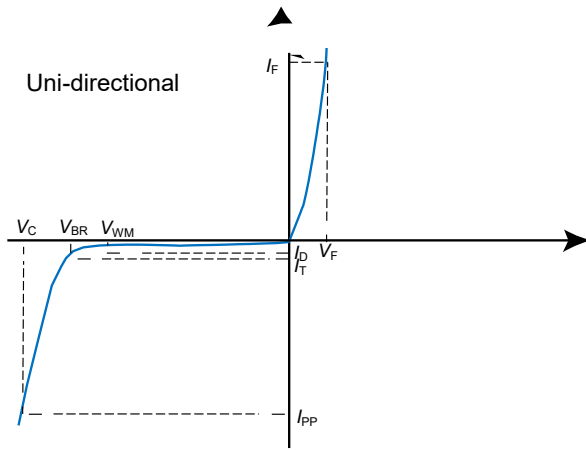

Performance Curve for Reference ($T_A=25^\circ\text{C}$ unless otherwise noted)

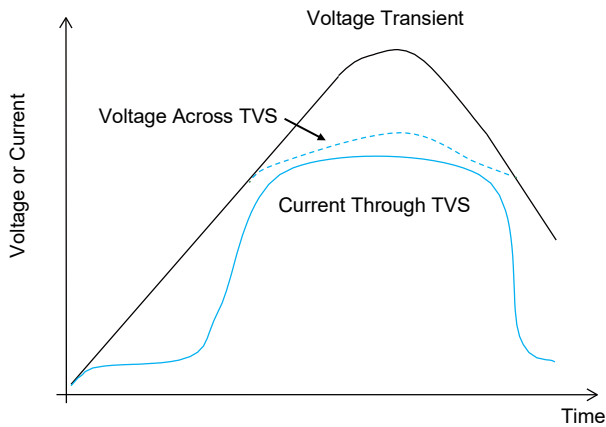


FIGURE 1 TVS Transients Clamping Waveform

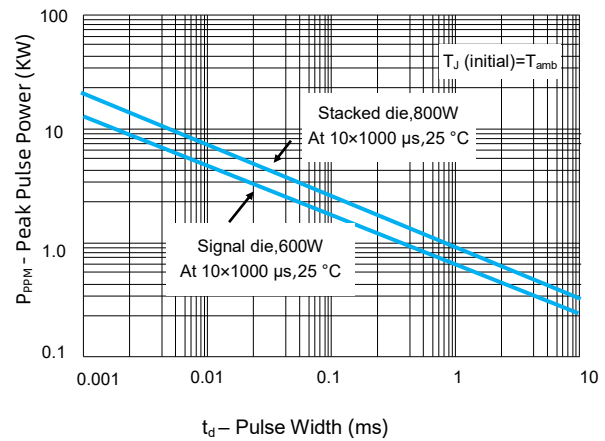


FIGURE 2 Peak Pulse Power Rating Curve

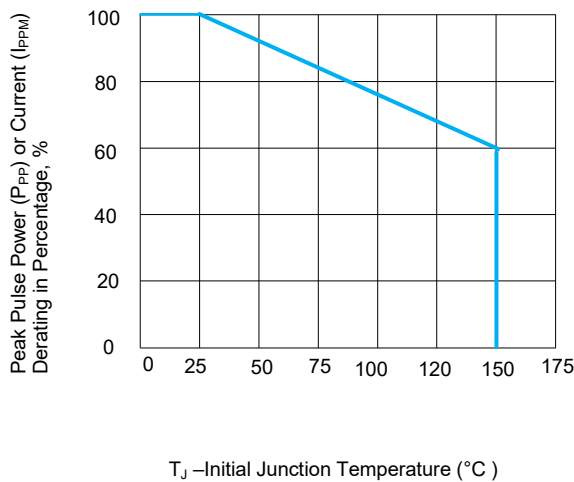


FIGURE 3 Peak Pulse Power Derating Curve

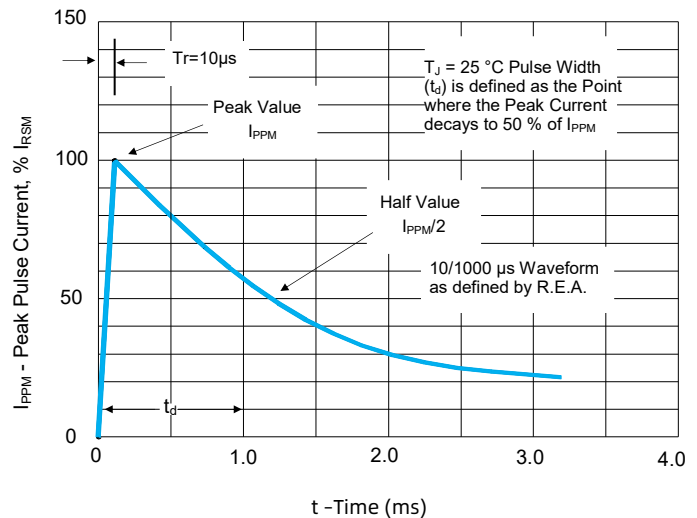


FIGURE 4 Pulse Waveform

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series

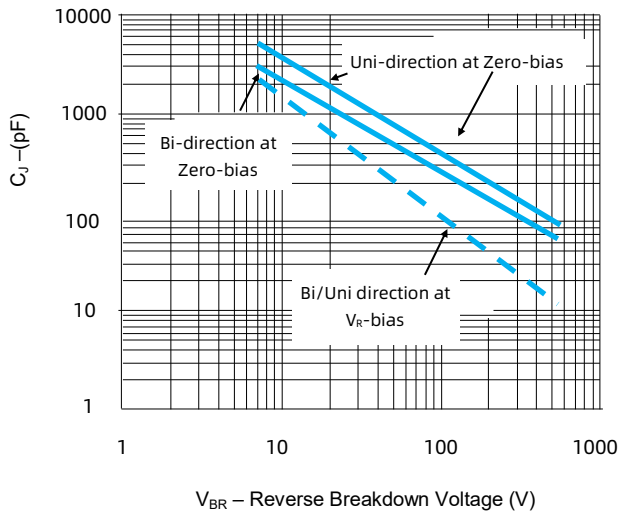


FIGURE 5 Typical Junction Capacitance

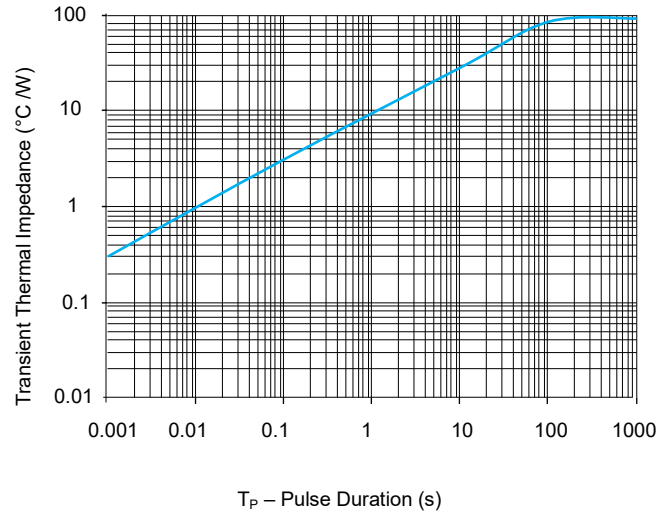


FIGURE 6 Typical Transient Thermal Impedance

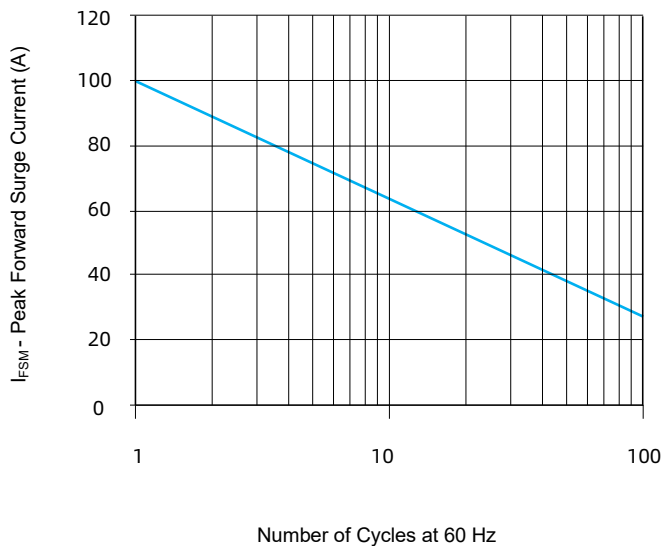


FIGURE 7 Maximum Non-Repetitive Forward Surge Current
Uni-Directional only

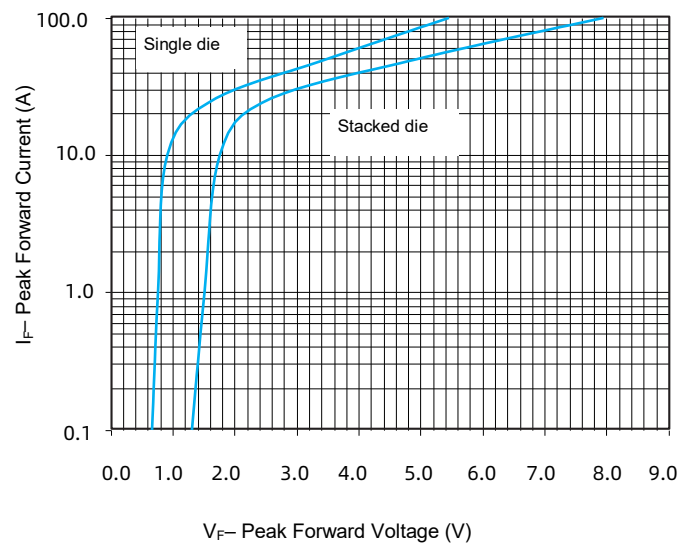


FIGURE 8 Peak Forward Drop vs Peak Forward Current
(Typical Values)

Environmental Specifications

High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Temperature Cycling	JESD22-A104
MSL	JESDEC-J-STD-020, Level 1
H3TRB	JESD22-A101
RSH	JESD22-A111

Physical Specifications


Weight	0.003 ounce, 0.093 grams
Case	JESD22DO214AA. Molded plastic body over glass passivated junction
Polarity	Color band denotes positive end (cathode) except Bidirectional
Terminal	Matte Tin-plated leads, Solderability per JESD22-B102

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series

Soldering Parameters

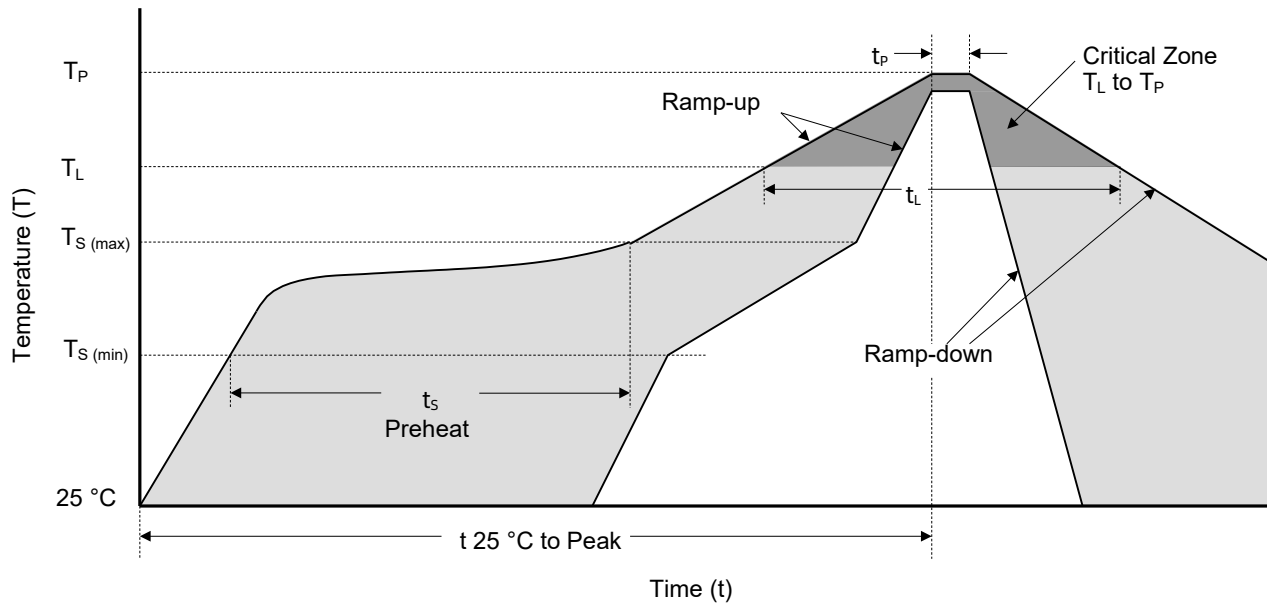

Reflow Soldering Parameters		Lead-Free Assembly
Pre-heat	Temperature Min ($T_{S(min)}$)	150 °C
	Temperature Max ($T_{S(max)}$)	200 °C
	Time (min to max) (t_s)	60 ~ 120 seconds
Average Ramp Up Rate (Liquidus Temp (T_L) to Peak		3 °C / second max.
$T_{S(max)}$ to T_L Ramp-up Rate		3 °C / second max.
Reflow	Temperature (T_L) (Liquidus)	217 °C
	Time (min to max) (t_L)	60 ~ 150 seconds
Peak Temperature (T_P)		260 ^{+0/-5} °C
Time of within 5 °C of Actual Peak Temperature (t_p)		20 ~ 40 seconds
Ramp-down Rate		6 °C / second max.
Time from 25 °C to Peak Temperature		8 Minutes max.
Do Not Exceed		260 °C

TVS Diodes

Transient Voltage Suppression Diodes

ASMB Series

Packaging Information

Tape	Symbol	Dimension (mm)
	W	12.00±0.30/-0.10
	P ₀	4.00±0.10
	P ₁	8.00±0.10
	P ₂	2.00±0.05
	D ₀	1.55±0.05
	D ₁	1.55±0.05
	E	1.75±0.10
	F	5.50±0.05
	A ₀	3.78±0.10
	B ₀	5.65±0.15
	K ₀	2.70±0.10
	T	0.30±0.05

Reel Size	13" Reel	
	A	330 mm
	C	13.2 mm
	W ₁	12.5 mm

Part Number	Package	QTY (Reel)	Packaging Option	Packaging Specification
ASMBxxx	DO-214AA	3000 PCS	Tape & Reel – 12 mm tape/13" reel	EIA STD RS-481

Glossary

Item	Description
V_C	Clamping Voltage Voltage across TVS in a region of low differential resistance that serves to limit the voltage across the device terminals.
V_R	Reverse Stand-off Voltage Maximum voltage that can be applied to the TVS without operation. NOTE : It is also shown as V_{WM} (maximum working voltage (maximum d.c. voltage)) and known as rated stand-off voltage (V_{SO}).
I_R	Reverse Leakage Current Current measured at V_R . NOTE : Also shown as I_D for stand-by current.
V_{BR}	Breakdown Voltage Voltage across TVS at a specified current I_T in the breakdown region.
I_{PPM}	Rated Random Recurring Peak Impulse Current Maximum-rated value of random recurring peak impulse current that may be applied to a device.
$P_{M(AV)}$	Rated Average Power Dissipation Maximum-rated value of power dissipation resulting from all sources, including transients and standby current, averaged over a short period of time.
P_{PPM}	Rated Random Recurring Peak Impulse Power Dissipation Maximum-rated value of the product of rated random recurring peak impulse current (I_{PPM}) multiplies by specified maximum clamping voltage (V_C).
C_J	Capacitance Capacitance across the TVS measured at a specified frequency and voltage.
V_{FS}	Peak Forward Surge Voltage Peak voltage across an TVS for a specified forward surge current (I_{FS}) and time duration. NOTE : Also shown as V_F .
I_{FS}	Forward Surge Current Pulsed current through TVS in the forward conducting region. NOTE : Also shown as I_F .
$\alpha_{V(BR)}$	Temperature Coefficient of Breakdown Voltage The change of breakdown voltage divided by the change of temperature.
I_{PP}	Peak pulse Current Peak pulse current value applied across the TVS to determine the clamping voltage V_C for a specified wave shape.
I_T	Pulsed D.C. Test Current Test current for measurement of the breakdown voltage V_{BR} . This is defined by the manufacturer and usually given in milliamperes with a pulse duration of less than 40 ms. NOTE : Also shown as I_{BR} .

—(GB-T 18802.321 / IEC 61643-321 / JESD210A)



ATTENTION

Usage

1. TVS must be operated in the specified ambient temp.
2. Do not clean the TVS with strong polar solvent such as ketone, esters, benzene and halogenated hydrocarbon, to avoid damaging the encapsulating layer.
3. Please do not apply severe vibration, shock or pressure to TVS, to avoid element cracking.

Replacement

1. If TVS is visually damaged, please replace it.
2. TVS is a non-repairable product. For safety sake, please use equivalent TVS for replacement.

Storage

1. Storage Temp. Range: (-55 to 150) °C.
2. Do not store the TVS at the high temp., high humidity or corrosive gas environment, to avoid influencing the solder- ability of the lead wires. The product shall be used up within 1 year after receiving the goods.

Environmental Conditions

1. TVS should not be exposed to the open air, nor direct sunshine.
2. TVS should avoid rain, water vapor or other condition of high temp. and high humidity.
3. TVS should avoid sand dust, salt mist, or other harmful gases.



Max. Typical Capacitance of TVS

The typical capacitance of TVS is listed in the specifications. Designers may refer to it when designing TVS in High frequency circuit.

Installation Mechanical Stress

1. Do not knock TVS when installing, to avoid mechanical damage.
2. Please do not apply severe vibration, shock or pressure to TVS, to avoid surface resin or element cracking.



Automotive TVS Diodes (Surface Mount) Feature Overview

										Page
Package Type	DO-214AA			ASMB	ASMB-VR					Series
	DO-214AB					ASMC	ASMC-VR	ASMD	A5.0SMD	
	DO-214AC	ASMA	ASMA-VR							
	DO-218AB									
Product Outline (mm)										
										
$V_R / V_{WM} (V)$ Reverse Stand-off Voltage	5.8 ~ 468	5.0 ~ 440	5.8 ~ 553	5.0 ~ 440	5.8 ~ 512	5.0 ~ 440	5.0 ~ 100	12.0 ~ 170		
$P_{PPM} (W)$ (10/1000 μs) Rated Peak Impulse Power Dissipation	400		600		1500		3000	5000		
Operating Temperature ($^{\circ}C$)	-55 to +150									

Page

Series

Automotive TVS Diodes (Surface Mount) Feature Overview

Package Type										Series
DO-214AA										
DO-214AB										
DO-214AC										
DO-218AB		SM5SxxA-C	SM5SxxCA-C	SM6SxxA-C	SM6SxxCA-C	SM8SxxA-C	SM8SxxCA-C	SM8TxxA	SM8TxxCA	
Product Outline (mm)										
V _R / V _{WM} (V) Reverse Stand-off Voltage		10.0 ~ 85.0						20.0 ~ 43.0	33.0 ~ 36.0	
P _{PPM} (W) (10/1000 μs) Rated Peak ImPulse Power Dissipation		3600		4600		6600		8000		
Operating Temperature (°C)		-55 to +175								